

1.

Remove plastic cap from the air inlet.



2.

Install an approved air fitting per your air system's specifications. This tool has a straight thread. If using a tapered thread fitting, you must use Teflon[®] tape.




3.

Attach the air hose and check for air leaks.





4.

To load the nails, detach the air hose from the tool, depress the magazine lock and pull open the slider.

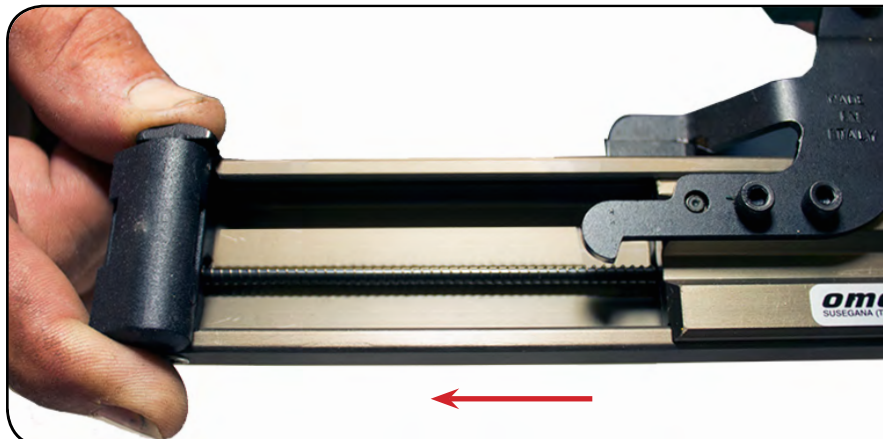

5.

Insert one strip of B/18 brad nails into the top of the magazine channel with the nail points angled down-ward.

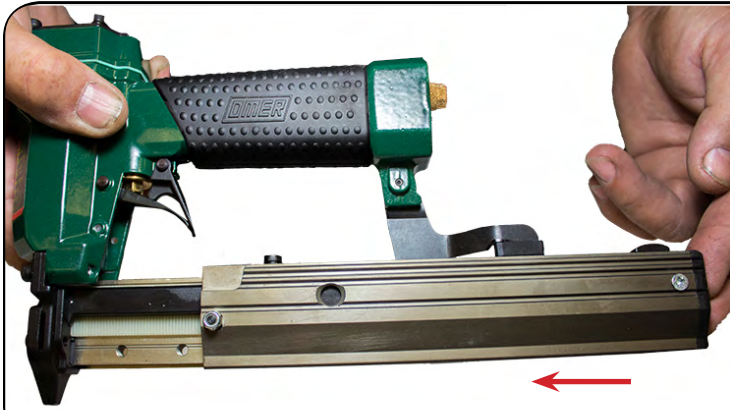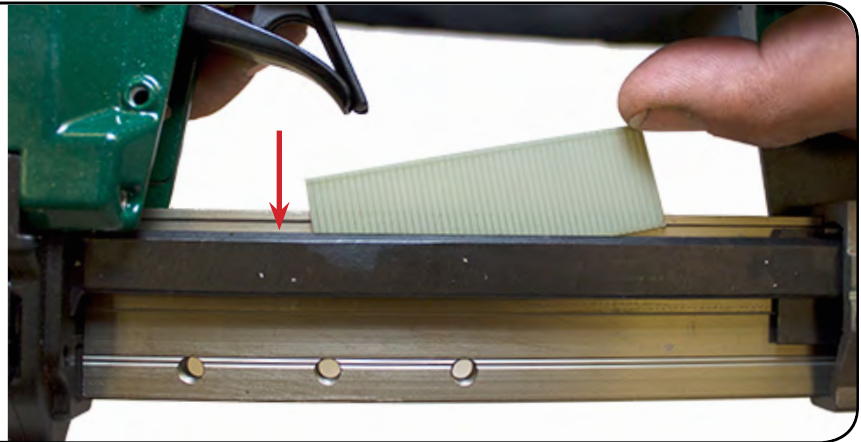

6.

Close the magazine by firmly pushing with your hand.

7.

Attach the air hose to the tool and operate at 70-105 psi.

