

Fastener Type

RAPTOR® Coil & Bulk Composite Nails



6.2 mm → | ← 1/4"



Part #
COIL-8/15
BULK-8

57 mm — — 2-1/4"

6.2 mm → | ← 1/4"




Part #
COIL-5/0
COIL-5/15
BULK-5

41 mm — — 1-5/8"

COIL Nomenclature

COIL-X/Y
X = Nail size; Penny
Y = Collation angle

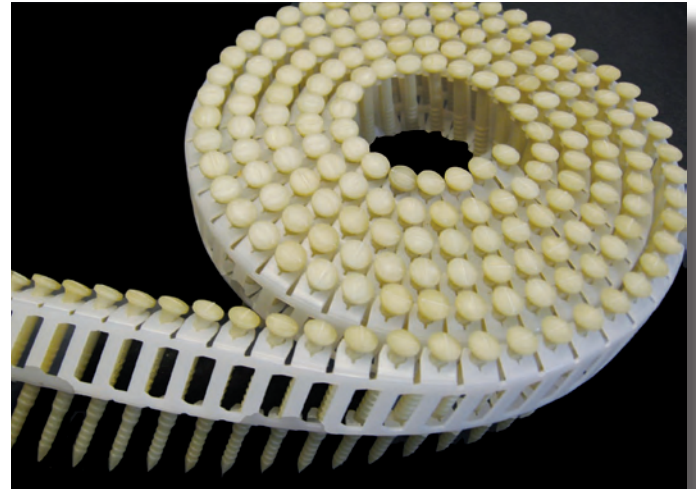

BENEFITS

- ✓ Sawable, Sandable & Planeable
- ✓ Never Rusts or Corrodes
- ✓ Bonds Like Glue
- ✓ Completely Non-Metal



APPLICATIONS

Siding
Fencing
Furring
Strapping
Doors
Furniture
Boatbuilding
Casket Manufacturing
Woodworking

TOOLS

Bulk nails:

Hammer
Palm Nailer

Coil nails:

Max CN565*
Hitachi NV65AH
Bostitch N6XCP
Fasco F33 CN15W-PS50
Senco SCN49
DuoFast CNP 60/65
(0° collation)

*recommended

Colors: RAPTOR® fasteners are available in colors such as White, Brown, Redwood, Cedar, Blue, Red and Gray. Please contact us for minimum order requirements and lead times.





MAX CN565 Coil Nailer

The MAX CN565 Coil Nailer is light weight and well-balanced. Users can easily adjust the nail depth by rotating the dial without the need for special tools. For user safety, it comes equipped with an anti-double fire mechanism so that the succeeding nail cannot be driven accidentally by recoil. The mechanism allows both bounce firing and single-shot firing. This nailer accepts RAPTOR® polymer composite nails and metal nails without any adjustment. It comes equipped with a plastic contact trip for sheathing and decking work, has a multi-directional exhaust cover and a NO-MAR attachment.



Available at www.maxusa.com

TECHNICAL DATA

| | |
|--------------------|-------------------------------------------------------|
| Model | MAX CN565 |
| Fastener range | 1-1/4" – 2-1/2" (32 – 65mm) |
| Magazine capacity | 200 plastic collated nails; 250-400 wire welded nails |
| Operating pressure | 60 – 100 psi (4 – 7 bar) |
| Dimensions LxWxH | 12.6" x 5.1" x 10.75" (319 x 130 x 273mm) |
| Weight | 4.9 lb (2.2 kg) |
| Collation angle | 15 Degrees |





Palm Nailer

The pneumatic Palm Nailer drives RAPTOR® composite bulk nails from 1-5/8" to 2-1/4" lengths and clamp nails from 1/2" up to 4" lengths. It has a comfortable design and is ideal for driving common bulk nails in confined areas and nailing clamp connectors.



TECHNICAL DATA

| | |
|--------------------|----------------------------------------------------------------------------------|
| Model | Palm Nailer |
| Fastener range | Bulk nails 1-5/8" – 2-1/4" (41.2 x 57.2mm) Clamp nails 1/2" – 4" (12 – 102mm) |
| Magazine capacity | 1 nail |
| Operating pressure | 70 – 90 psi (5 – 6 bar) |
| Dimensions LxH | 5.0" x 4.9" (127 x 124mm) |
| Weight | 2.9 lb (1.3kg) |